NPP Advanced Technology Microwave Sounder (ATMS): Sensor Description and Predicted Data Product Performance

William J. Blackwell, Laura J. Bickmeier, Laura G. Jairam, R. Vincent Leslie, and Michael J. Pieper
Lincoln Laboratory, Massachusetts Institute of Technology
WJB@LL.MIT.EDU

Abstract

A suite of sensors scheduled to fly onboard the NPOESS Preparatory Project (NPP) satellite in 2011 will both continue and improve the environmental data records provided by operational and research missions over the last 40 years. The Cross-track Infrared and Microwave Sounding Suite (CrIMSS), consisting of the Cross-track Infrared Sounder (CrIS) and the first space-based, Nyquist-sampled cross-track microwave sounder, the Advanced Technology Microwave Sounder (ATMS), will provide atmospheric vertical profile information needed to improve numerical weather and climate modeling. The ability of ATMS to sense temperature and moisture profile information in the presence of non-precipitating clouds complements the high vertical resolution of CrIS. Furthermore, the ability of ATMS to sense scattering of cold cosmic background radiance from the tops of precipitating clouds allows the retrieval of precipitation intensities with useful accuracies over most surface conditions.

This poster will present several assessments of the performance of ATMS and the geophysical quantities that are to be derived using ATMS measurements. Pre-launch testing of ATMS has characterized the principal calibration parameters and has enabled predictions of on-orbit performance with high levels of confidence. Planned on-orbit characterization of ATMS will further improve both the measurement quality and the understanding of various error contributions.

ATMS Continues Successful AMSU/MHS/HSB Heritage

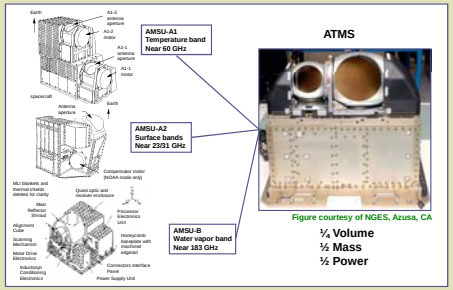

ATMS Overview

- **Built by Northrop Grumman Electronic Systems under contract to NASA Goddard**
- **NPP unit delivered Nov. 2005 for 2011 launch; C1 unit on track for 2012 delivery**
- **Total-power radiometer with 22 channels; based on AMSU/MHS/HSB heritage**

ATMS Radiometer Block Diagram

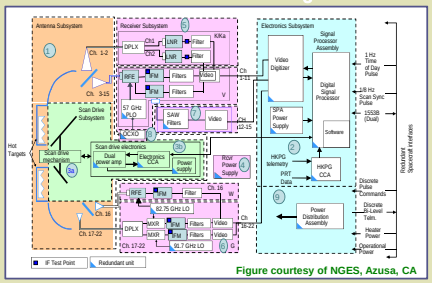

ATMS Design Features and Challenges

- **Antenna quasi-optics yield compact system through frequency diplexing**
- **Highly integrated scan drive and electronics subsystems**
- **High-performance MMIC receivers**

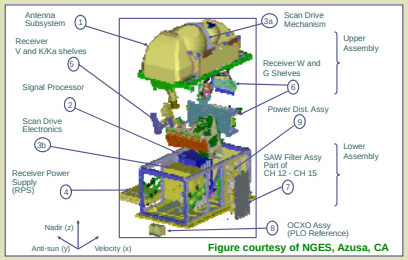

Summary of Key ATMS Attributes

Parameter	PFM Measurement
Envelope dimensions	70x60x40 cm
Mass	75 kg
Operational average power	119 W
Operational peak power	200 W
Data rate	30 kbps
Absolute calibration accuracy	0.6 K
Maximum nonlinearity	0.36 K
Frequency stability	0.5 MHz
Pointing knowledge	0.03 degrees
NEΔT	0.3/0.5/1.0/2.0 K
Orbit altitude	824 km (NPP)
Reliability	0.87

	AMSU/MHS				ATMS				
	Ch	Frequency (GHz)	Pol	Antenna beamwidth	Footprint spacing	Ch	Frequency (GHz)	Pol	Antenna beamwidth	Footprint spacing
AMSU-A	1	23.8	QV	3.3°	3.33°	1	23.8	QV	5.2°	1.11°
	2	31.399	QV	3.3°	3.33°	2	31.4	QV	5.2°	1.11°
	3	50.299	QV	3.3°	3.33°	3	50.3	QH	2.2°	1.11°
				3.3°	3.33°	4	51.76	QH	2.2°	1.11°
	4	52.8	QV	3.3°	3.33°	5	52.8	QH	2.2°	1.11°
	5	53.595 ± 0.115	QH	3.3°	3.33°	6	53.596 ± 0.115	QH	2.2°	1.11°
	6	54.4	QH	3.3°	3.33°	7	54.4	QH	2.2°	1.11°
	7	54.94	QV	3.3°	3.33°	8	54.94	QH	2.2°	1.11°
	8	55.5	QH	3.3°	3.33°	9	55.5	QH	2.2°	1.11°
	9	fo = 57.29	QH	3.3°	3.33°	10	fo = 57.29	QH	2.2°	1.11°
	10	fo ± 0.217	QH	3.3°	3.33°	11	fo±0.3222±0.217	QH	2.2°	1.11°
	11	fo±0.3222±0.048	QH	3.3°	3.33°	12	fo± 0.3222±0.048	QH	2.2°	1.11°
	12	fo ±0.3222±0.022	QH	3.3°	3.33°	13	fo±0.3222±0.022	QH	2.2°	1.11°
	13	fo± 0.3222±0.010	QH	3.3°	3.33°	14	fo±0.3222 ±0.010	QH	2.2°	1.11°
	14	fo±0.3222±0.0045	QH	3.3°	3.33°	15	fo± 0.3222±0.0045	QH	2.2°	1.11°
	15	89.0	QV	3.3°	3.33°				2.2°	1.11°
MHS	16	89.0	QV	1.1°	1.11°	16	88.2	QV	2.2°	1.11°
	17	157.0	QV	1.1°	1.11°	17	165.5	QH	1.1°	1.11°
	18	183.31 ± 1	QH	1.1°	1.11°	18	183.31 ± 7	QH	1.1°	1.11°
	19	183.31 ± 3	QH	1.1°	1.11°	19	183.31 ± 4.5	QH	1.1°	1.11°
	20	191.31	QV	1.1°	1.11°	20	183.31 ± 3	QH	1.1°	1.11°
						21	183.31 ± 1.8	QH	1.1°	1.11°
						22	183.31 ± 1	QH	1.1°	1.11°

Exact match to AMSU/MHS
Only Polarization different
Unique Passband
Unique Passband, and Pol. different from closest AMSU/MHS channels

- **The ATMS swath width is approximately 2600km, compared with 2200km for AMSU/MHS**
- **Two additional ATMS water vapor channels improve retrieval performance relative to AMSU/MHS**
- **The MIT-LL ATMS Proxy Data Generator allows CrIMSS algorithms to be evaluated using AMSU/MHS observations**

Primary ATMS Sounding Bands



Summary of ATMS Radiometric Performance

- **The ATMS SDR products will meet or exceed the accuracy of the equivalent AMSU/MHS products**
- **Nyquist sampling of ATMS TDR products allows improved EDR products due to beam sharpening**
- **Prelaunch radiometric testing has indicated excellent ATMS performance**
- **Planned on-orbit cal/val activities will further refine calibration accuracy and ensure "climate quality"**

ATMS Products (CDR and IP not archived by IDPS)

Data Product	Description
RDR (Raw Data Record)	FOV[1] antenna temperature (counts)
TDR (Temperature Data Record)	FOV[1] antenna temperature (K)
SDR (Sensor Data Record)	FOR[1] brightness temperature (K)
EDR (Environmental Data Record)	P/T/WV profile
CDR (Climate Data Record)	"Climate-optimized" product
IP (Intermediate Product)	Used to generate EDR/CDR

[1]FOV = "field of view", FOR = "field of regard"

ATMS Contribution to Temperature and Moisture EDR's



- **ATMS improves upon CrIS-only retrievals, even in clear scenes**
- **ATMS information critical as cloudiness increases (impact doubles for t(h) and triples for q(h))**

Observation Impact: 3DVAR DAS & Forecasts

Accumulated forecast error reduction due to various observing instruments for the February 2007 forecasts – ½ degree system

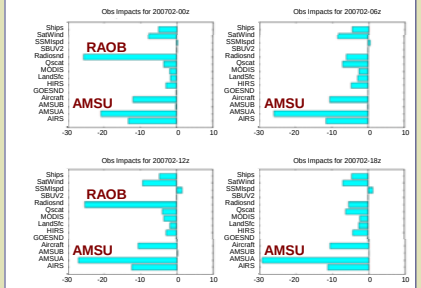

Figure courtesy of Gelaro and Rienecker, NASA GMAO

Retrieval of Precipitation Using Opaque Microwave Bands

Black and red circles highlight "before" and "after" differences between AMSU and ATMS, and between ATMS and ATMS-sharpened, for six simulated storms validated with AMSU. Note the better definition of strong convective cells with ATMS due to its 33-km resolution and Nyquist sampling, and the better recovery of the warm rain with sharpening

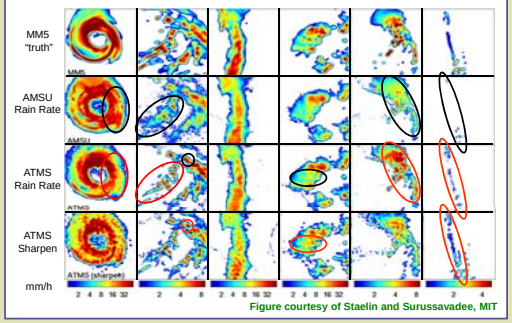

Figure courtesy of Staelin and Surussavadee, MIT

Acknowledgments

Sergey Krimchansky and Robert Lambeck (NASA GSFC) provided expert guidance to all facets of ATMS development. Francisco Andolz (GSFC) provided assistance with ATMS data formatting and ingestion of test data. Edward Kim and Joseph Lyu (GSFC) contributed substantially to ATMS test data analysis and planning of cal/val activities. The NGES team including Hector Macias, Steve Opel, Douglas MacNeil, Prabodh Patel, Kent Anderson, Dennis Lord, Louis Anderson, and Luvida Asai patiently answered many questions and provided insight into countless tests, procedures, and analyses. The NGAS team including Giovanni DeAmici, Paul Lee, Ronson Chu, and Degui Gu assisted with calibration and details related to SDR and EDR production. Karen St. Germain, Bruce Guenther, Carl Hoffman, and Clint Northrop at the NPOESS Integrated Program Office supported and facilitated this work. The authors gratefully acknowledge many who have made significant and profound contributions to the development and calibration of ATMS, including John Solman, David Staelin, Phil Rosenkranz, Bjorn Lambrigtsen, Jim Shiue, Lynn Chidester, Gene Poe, and Tsan Mo. The authors apologize for any omissions and look forward to future collaborations.

This work was sponsored by the National Oceanic and Atmospheric Administration under Air Force contract FA8721-05-C-0002. Opinions, interpretations, conclusions, and recommendations are those of the authors and not necessarily endorsed by the United States Government.